
versatile™ 4C Mailbox, 4C08D-09

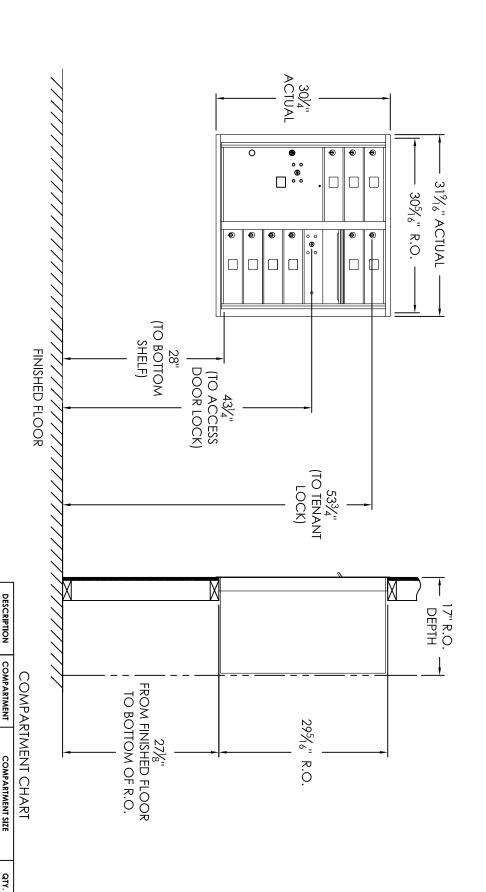

Notes:

- 1. This module meets the USPS STD-4C requirements for installation defined below when the mailbox is installed per the dimensions provided on this drawing.
- At least one customer compartment shall be positioned less then 48" above finished floor (AFF). No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
- No patron (tenant) lock shall be positioned more than 67" AFF. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
- The rough opening width for multi-unit 4C installations = (the sum of all actual unit widths) 1%"

ωΝ

This 4C mailbox can also be used for private applications. e. The USPS Arrow lock shall be positioned 36"- 48" AFF.

PRODUCT SERIES: VERSATILETM 4C FRONT LOAD MAILBOX

www.florencemailboxes.com • (800) 275-1747 5935 Corporate Drive • Manhattan, KS 66503 A GIBRALTAR INDUSTRIES COMPANY manutacturing compo

Í	MODEL 4C08D-09	REV B
	SCALE NONE	LAST REV DATE 5/9/2014
7502 •	DRAWING NUMBER	DRAWN BY

4C08D-09CS RAK